






VENTILATING SYSTEM ARRANGEMENT FOR GENERATOR ROOM, L-I 1:100

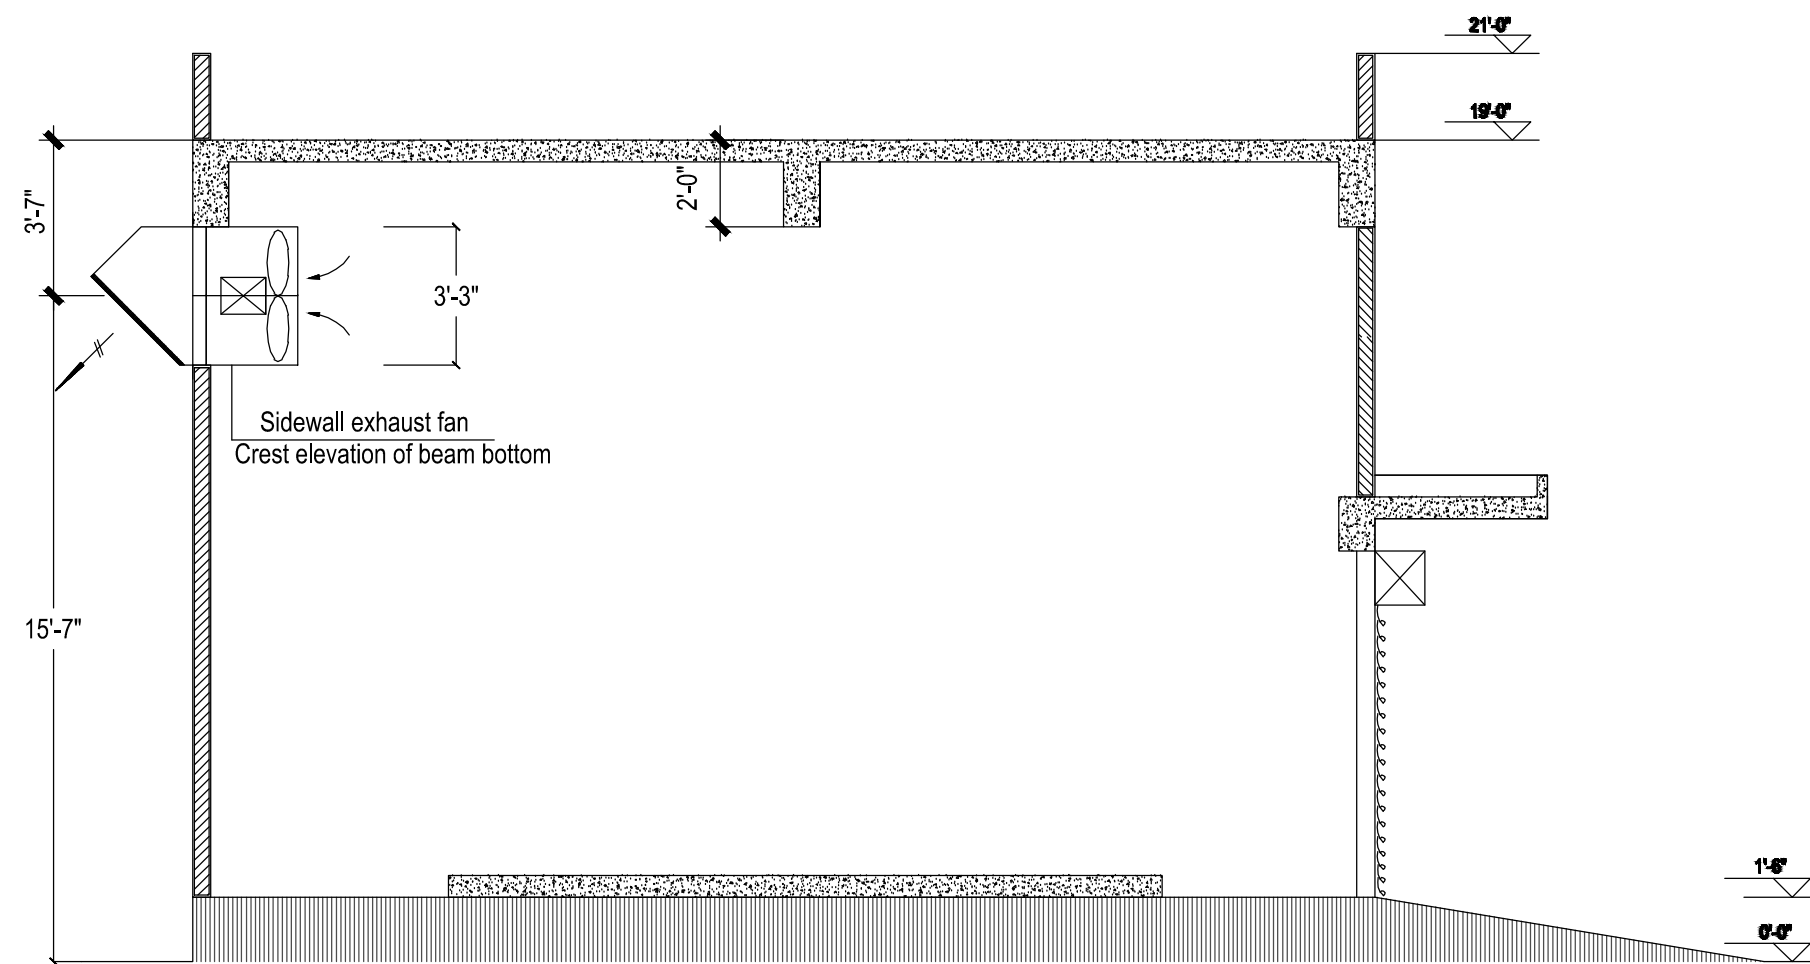

SECTION A-A 1:50

| NO. | EQUIPMENT NO. | DESCRIPTION                              | UNIT | QUANTITY | REMARK      |
|-----|---------------|--|------|----------|-------------|
| 1   | 0212-PF-01~04 | Sidewall exhaust fan                     | set  | 3        | 400V, 2.2kW |
|     |               | Crest elevation of beam bottom           |      |          |             |
|     |               | Wall opening size is 1000x1000mm         |      |          |             |
|     |               | Volume:18300m³/h; Static Pressure: 230Pa |      |          |             |
|     |               | Speed: VTA                               |      |          |             |
|     |               | Accessories: 45° weather cover,          |      |          |             |
|     |               | Gravity back-draft damper,               |      |          |             |
|     |               | Stainless steel insectscreen,            |      |          |             |
|     |               | Safety protective screening              |      |          |             |

|  |  |        |                 |   |   |
|--|--|--------|-----------------|---|---|
| REV  | DATE   | APPR'D | CLIENT APPROVAL |   |   |
|  |  |        |                 |   |   |
|  |  |        |                 |   |   |
|  |  |        |                 |   |   |
|  |  |        |                 |   |   |
| A  | ISSUED FOR APPROVAL  | AS     | MH              | VG  | 2015.10.28  |
| REV  | DESCRIPTION  | PREP'D | CHK'D           | APP'D   | DATE  |
| REVISIONS  |  |        |                 |   |   |
| FOR  |  |        |                 |   |   |
|   | BANGLADESH GAS FIELDS COMPANY LIMITED  |        |                 |   |   |
|   | CONSORTIUM OF<br>ZICOM EQUIPMENT PTE. LTD.<br>AND<br>SINOPEC PETROLEUM ENGINEERING CORPORATION |        |                 |  |   |
| 2 X 75 MMSCFD TEG DEHYDRATION TYPE NATURAL GAS PROCESS PLANT   |  |        |                 |   |   |
| TITLE  |  |        |                 |   |   |
| VENTILATING SYSTEM ARRANGEMENT FOR GENERATOR ROOM, L-I   |  |        |                 |   |   |
| FORMAT   | DRAWING NO.  |        |                 |   | REVISION  |
| A3   | 252-0212-EMHV-DW00-0001  |        |                 |   |  |
|  | SCALE  | 1:100  | SHEET           | 1 OF 1  |   |
| This Drawing is Property of Consortium of ZICOM Equipment Pte Ltd., & Sinopec Petroleum Engineering Corporation and any information, contained in this Drawing will not be Reproduced, Disclosed to others without Explicit Written Permission from ZICOM Equipment Pte Ltd., & Sinopec Petroleum Engineering Corporation. |  |        |                 |   |   |